



CFC-free Refrigerant Water-cooled Water Chiller

SIC-17W-R2




Refer carefully to this manual before operation.

SIC-W-R2 Series

■ Coding Principle

SIC - XW - R2 - XX

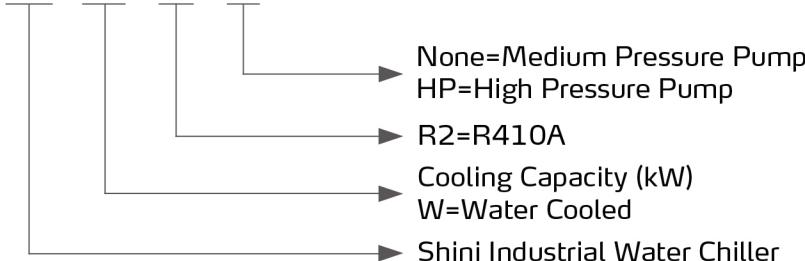

Control Panel

■ Features

- Cooling range: 7~25°C;
- Stainless steel insulated water tank;
- Equipped with an anti-freeze thermostat;
- Tube-in-shell condenser that features rapid and well heat transfer;
- R410A ozone-friendly refrigerant with a high efficient cooling result;
- The refrigerating system has high and low-pressure alarm protection;
- Compressor and pump overload protection;
- High precision temperature controller with a display precision of $\pm 0.1^\circ\text{C}$;
- Well-known compressor that ensures low noise, energy-efficient, and long service life;
- Hot-gas bypass valve with a control accuracy of up to $\pm 1^\circ\text{C}$;
- RS485 communication interface to realize centralized monitoring.

The following features apply to models with one or two compressors.

- Circular stainless steel thermal insulated water tank and unique cyclone design for even distribution of chill water;
- Water loop with a return water filter that adopts PVC-U water pipe to ensure the cleanliness of the water quality;
- Plate heat exchanger ensures efficient heat exchanging;
- Equipped with safety valves for stable system pressure. The inlet and outlet pipe adopt an adaptive bypass valve to ensure stable outlet water pressure;
- Equipped with a flow switch to avoid the unit from operating without water flow;
- The standard water tank level indicator for visualizing check of the water level;
- Compact outline structure and small foot.

■ Options

- Liquid solenoid valve for pump down a refrigerant circuit to avoid liquid migration back to the compressor on the off-cycle, and it can potentially prevent liquid slug on startup. Add "LS" at the end of the model code.
- Optional refrigerant indicator for visual checking of refrigerant moisture content, and add "LSG" at the end of the model code.


The following options apply to models with three or above compressor

- For models with a high pressure pump, add "HP" at the end of the model code;
- The level indicator in the water tank is optional to check whether the water level is within normal range and add "SG" at the end of the model code;
- The flow switch is optional to ensure that the unit is working under water flow, and add "FW" at the end of the model code;
- The level switch in the water tank is optional to check if the water level is normal, and add "LW" at the end of the model code;


■ Application

SIC-W-R2 series are applicable for cooling moulds to reduce the product moulding cycle; they are also available in the cooling of equipment to maintain a normal temperature. Besides, they are suitable for other industries with the need for water cooling.

■ Working Principle

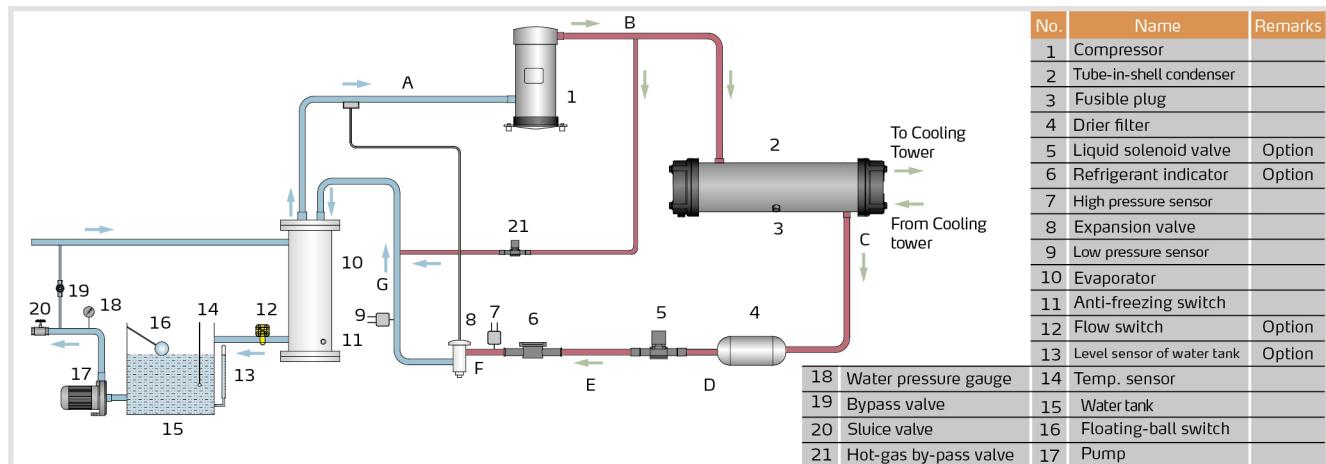


■ Outline Drawings

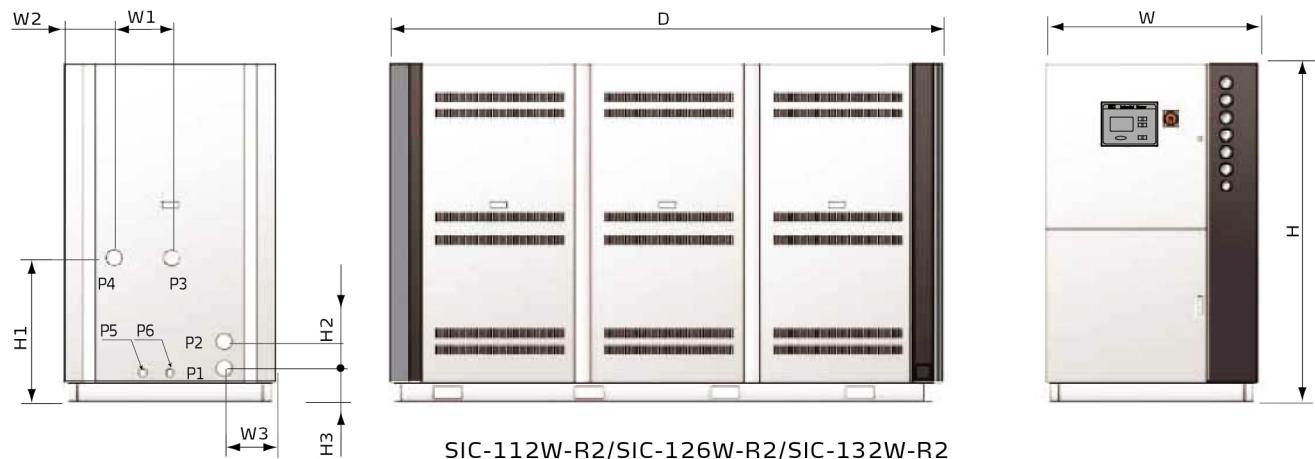

SIC-112W-R2/SIC-126W-R2/SIC-132W-R2

Model	H (mm)	H1 (mm)	H2 (mm)	H3 (mm)	W (mm)	W1 (mm)	W2 (mm)	W3 (mm)	D (mm)	P1 (inch) Cooling Water Inlet	P2 (inch) Cooling Water outlet	P3 (inch) Chilling Water Inlet	P4 (inch) Chilling Water outlet	P5 (inch) Water Tank Outlet Port	P6 (inch) Water Tank Overflow Port	Weight (kg)
SIC-112W-R2	1760	750	140	190	1100	300	260	267	2870	2 ¹ /2	2 ¹ /2	2 ¹ /2	2 ¹ /2	1	1	1200
SIC-126W-R2	1760	490	140	190	1100	300	230	250	3085	2 ¹ /2	2 ¹ /2	2 ¹ /2	2 ¹ /2	1	1	1450
SIC-132W-R2	1760	520	140	190	1100	205	325	505	3285	2 ² 1/2	2 ² 1/2	2 ¹ /2	2 ¹ /2	1	1	1750

SIC-W-R2 Series

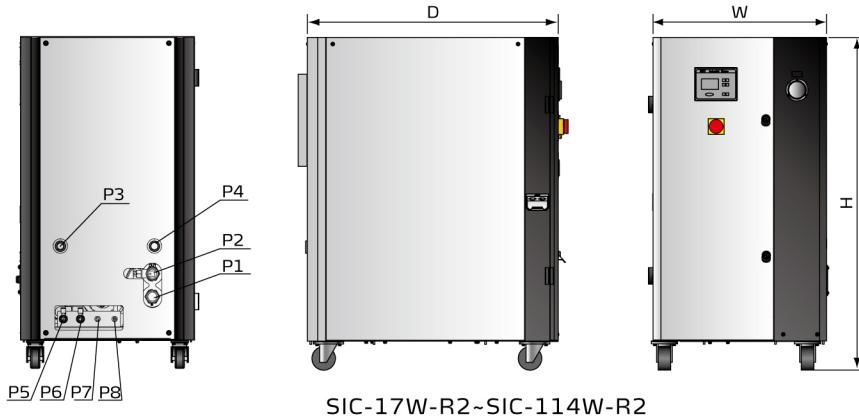

SIC-17W-R2~SIC-114W-R2

Model Item	SIC-17W-R2	SIC-29W-R2	SIC-38W-R2	SIC-57W-R2	SIC-76W-R2	SIC-114W-R2
H(mm)	1266	1276	1276	1356	1645	1700
H1(mm)	468	1090	1090	1156	1253	1350
W(mm)	661	810	810	856	1044	1044
W1(mm)	358	364	364	324	557	503
W2(mm)	151.5	233	233	266.5	235.5	269
W3(mm)	159	623	623	650	622	577.5
D(mm)	955.5	1092	1092	1194	1826	1876
P1(inch) Cooling Water Inlet (female thread)	Rc1	Rc1.25	Rc1.5		Rc2	
P2(inch) Cooling Water outlet (female thread)	Rc1	Rc1.25	Rc1.5		Rc2	
P3(inch) Chilled water inlet (female thread)	Rc1	Rc1.25	Rc1.5		Rc2	
P4(inch) Chilled water outlet (female thread)	Rc1	Rc1.25	Rc1.5		Rc2	
P5(inch) Evaporator water drainage port (female thread)			G1/2			
P6(inch) Water tank outlet (female thread)			G1/2			
P7(inch) Water tank overflow port (male thread)			R1/2			
P8(inch) Water tank water refilling port (male thread)			R1/2			
Weight (kg)	250	330	350	440	720	882

SIC-W-R2 Series

Model Selection Reference

Mould Clamping Force (T)	Moulding Capacity (kg/hr)	Model (kW)	Mould Clamping Force (T)	Moulding Capacity (kg/hr)	Model (kW)
≤450	≤45	17	≤2500	≤250	76
≤650	≤65	29	≤4000	≤400	114
≤850	≤85	38	≤5000	≤500	112(7°C出水)
≤1800	≤180	57	≤6000	≤600	126(7°C出水)

Specifications (50Hz)

Item	Model	SIC-Parameter	17W-R2	29W-R2	38W-R2	57W-R2	76W-R2	114W-R2	112W-R2	126W-R2	132W-R2	
Cooling ¹⁾ Capacity	kW		17	29	38	57	76	114	148	166	174	
Cooling ²⁾ Capacity	kW		15	27	32	49	69	100	-	-	-	
Cooling ³⁾ Capacity	kW		14	24	29	45	62	91	112	126	132	
Type												
Compressor	Quantity		1		2		3		4			
	Power (kW)		3.18	4.98	6.79	10.15	6.79×2	10.15×2	28.35	31.5	33.4	
Refrigerant	Filling quantity (kg)		2.85	6.8	5.6	9.8	6.5×2	11×2	8.6×2+5.7	6.5×3	6.5×4	
	Control Mode		Thermostatic expansion valve									
Evaporator	Type		R410A									
	Type		Plate style						Tube-in-shell style			
Condenser	Cooling Water Flow(L/min)		48.7	83.1	108.9	163.4	217.9	326.8	321.1	361.2	378.4	
	Type		Tube-in-shell style									
Pump ⁴⁾ (50Hz)	In/out Pipe(inch)		Rc1.5	Rc2	Rc2	Rc2	Rc2	Rc2	2 ¹ /2	2 ¹ /2	2×2 ¹ /2	
	Cooling Water Flow (L/min)		60.9	103.9	136.1	204	272.3	408.5	417.4	469.6	491.9	
Water Tank Capacity (L)		80	150	150	150	150	150	150	400			
Protective Device	Power (kW)		0.75/1.1	1.1/1.1	1.5/2.2	1.8/2.4	2.4/3	4/4.4	-/3.0/4.0	-/4.0/5.5		
	Working Pressure ⁵⁾ (kgf/cm ²)		Medium pressure≥3, High pressure≥4									
Total Power (kW) ⁶⁾		3.93	5.95	8.3	11.95	16.58	24.3	-/31.4/32.4	-/35.5/37	-/37.4/38.9		
Compressor	Overload relay											
	Pump		Overload relay									
	Refrigerant Circuit		High and low pressure transmitter/Anti-freezing switch									
	Cooling water Circuit		Flow switch(Option) /Water level switch (Option) / By-pass valve									
Operation Noise dB(A)		67	67	71	71	67	71	81.4	79.6	86.5		
Use environment ⁷⁾		Under the condition with good ventilation or ambient temperature not exceeding the service pressure										
Power ⁸⁾		3Φ, 400V/AC, 50Hz										
Unit Conversion		1 kW = 860 kcal/hr 1 RT = 3,024 kcal/hr 10,000 Btu/hr = 2,520 kcal/hr										

Notes:

- 1) Cooling capacity 1 is measured based on the flow of 0.172m³/(h.kW) and the outlet temperature of 15°C of chilled water under the environmental temperature of 30°C.
- 2) Cooling capacity 2 is measured based on the flow of 0.172m³/(h.kW) and the outlet temperature 10°C of chilled water under the environmental temperature of 30°C.
- 3) Cooling capacity 3 is measured based on the flow of 0.172m³/(h.kW) and the outlet temperature 7°C of chilled water under the environmental temperature of 30°C.
- 4) Pump pressure of 3kgf/cm² is standard; customers can change for high-pressure pumps (use HP for short; e.g., SIC-W-R2-HP), specific parameters in turn as shown above.
- 5) The pressure value is the state when the pump inlet negative pressure is 0;
- 6) Pump power, fan power, and compressor power are included in total power.
- 7) The water-cooled water chiller applies to the environment temperature of 35°C or below.
- 8) Special orders of machine voltage are available according to the request.

■ Specifications (60Hz)

Item	Model SIC-Parameter	17W-R2	29W-R2	38W-R2	57W-R2	76W-R2	114W-R2	112W-R2	126W-R2	132W-R2
Cooling Capacity ¹⁾	kW	20	33	44	66	88	132	177.6	199.2	208.8
Cooling Capacity ²⁾	kW	17	31	37	56	80	116	-	-	-
Cooling Capacity ³⁾	kW	16	28	33	52	71	100	134.4	151.2	158.4
Compressor	Type					Scroll				
	Power(kW)	3.82	5.97	8.16	12.18	8.16×2	12.18×2	33.5	37.5	39
	Filling quantity (kg)	2.85	6.8	5.6	9.8	6.5×2	11×2	8.6×2	6.5×3	6.5×4
Refrigerant	Control Mode				Thermostatic expansion valve					
	Type				R410A					
Evaporator	Type				Plate style					
	Cooling Water Flow (L/min)	56	95.6	125.2	188	250.5	375.8	321.1	361.2	378.4
Condenser	Type				Tube-in-shell style					
	In/out Pipe (inch)	Rc1.5	Rc2	Rc2	Rc2	Rc2	Rc2	Rc2	Rc2	2×2 ¹ /2
	Cooling Water Flow(L/min)	70.1	120.5	156.5	235	313.2	470	417.4	469.6	491.9
Water Tank Capacity (L)		80	150	150	150	150	150		400	
Pump ⁴⁾	Power (kW)	1.1/1.5	1.5/2.2	1.5/2.2	2.2/3	3/3	4/5.5		5/6.9	
	Working Pressure ⁵⁾ (kgf/cm ²) ²				Medium pressure ≥3, High pressure≥4					
Total Power (kW) ⁶⁾		4.92/5.32	7.48/8.17	9.66/10.36	14.38/15.18	19.32	28.36/29.86	38.41/40.44	42.7/44.96	42.26/44.50
Protective Device	Compressor				Overload relay					
	Pump				Overload relay					
	Refrigerant Circuit				High and low pressure switches/Anti-freezing switch					
	Cooling water Circuit				High and low pressure transmitter/Anti-freezing switch					
Operation Noise dB(A)		67	67	71	71	67	71	81.4	79.6	86.5
Use environment ⁷⁾		Under the condition with good ventilation or ambient temperature not exceeding the service pressure								
Power ⁸⁾		3Φ, 230/400/460/575VAC, 60Hz								
Unit Conversion		1 kW = 860 kcal/hr			1 RT = 3,024 kcal/hr		10,000 Btu/hr = 2,520 kcal/hr			

Notes:

- 1) Cooling capacity 1 is measured based on the flow of 0.172m³/(h.kW) and the outlet temperature of 15°C of chilled water under the environmental temperature of 30°C.
- 2) Cooling capacity 2 is measured based on the flow of 0.172m³/(h.kW) and the outlet temperature 10°C of chilled water under the environmental temperature of 30°C.
- 3) Cooling capacity 3 is measured based on the flow of 0.172m³/(h.kW) and the outlet temperature 7°C of chilled water under the environmental temperature of 30°C.
- 4) Pump pressure of 3kgf/cm² is standard; customers can change for high-pressure pumps (use HP for short; e.g., SIC-W-R2-HP), specific parameters in turn as shown above.
- 5) The pressure value is the state when the pump inlet negative pressure is 0;
- 6) Pump power, fan power, and compressor power are included in total power.
- 7) The water-cooled water chiller applies to the environment temperature of 35°C or below.
- 8) Special orders of machine voltage are available according to the request.

Shini Group

Addr: No. 23, Minhe St., Shulin Dist.,
New Taipei, Taiwan

Tel: +886 2 2680 9119

Fax: +886 2 2680 9229

Email: shini@shini.com

Factories:

- Taiwan
- Dongguan
- Pinghu
- Ningbo
- Chongqing
- Pune

2026-01-15-04 Copyrights Reserved.